

# VB400 14-PORT DOCK

Host multiple VB400 cameras for simultaneous rapid charging, configuration and video downloading.



## GENERAL INFORMATION



Product Code	VB-400-DOCK-14/AUS, VB-400-DOCK-14/UK, VB-400-DOCK-14/EU, VB-400-DOCK-14-US, VB-400-DOCK-14/ROW
Hosts Multiple VB400s	14 VB400 camera ports
Scalability	Multiple docking stations can be connected to a DockController
Compatibility	Compatible with DockController DC-200
Easy To Deploy	Connection is a single USB to the DockController, and a mains adaptor for power (USB cable supplied) Eliminates need for separate wiring to each camera
Speedy Plug-in / Pull-out Connectivity	VB400 cameras can be easily docked or undocked for speedy use
Flexible Docking	Flexible for use with camera accessories attached Can be securely fastened to a shelf or other mounting surface - can be secured at an angle
Warranty	Please speak to your account manager for more information about the warranties available in your region

## SIZE AND WEIGHT

Dimensions	200mm x 38mm x 436mm
Weight	2.2kg (3.5kg boxed)

## CHARGING, POWER & INTERFACE

Charging	Up to 8 hrs from a fully flat VB400 battery
Power Requirement	12V/5A PSU, input 100-240V (PSU supplied)
Interface	USB 2.0 compatible USB 3.0 compatible
Operating Temperature	0° to 40°C (32° to 104°F)
Storage Temperature	-55° to 70°C (-67° to 158°F)

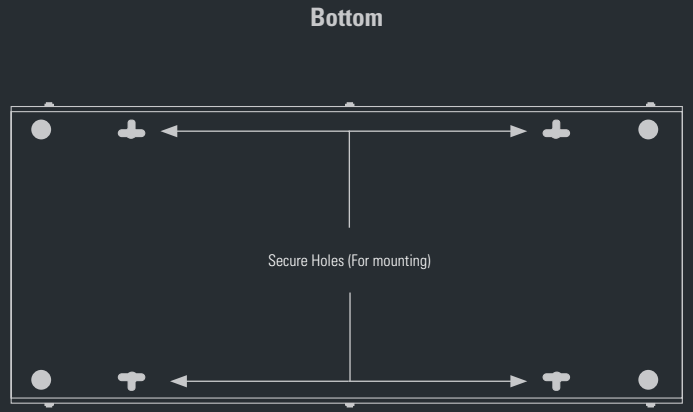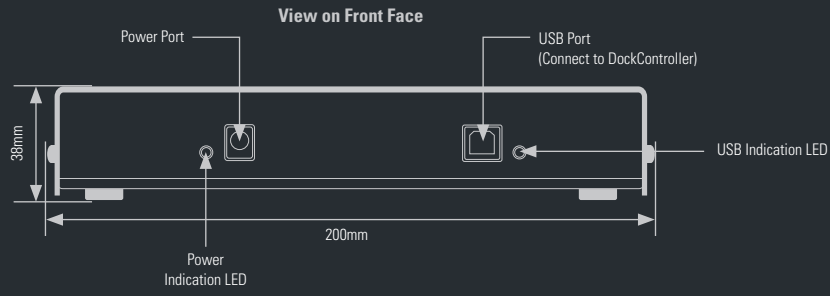

For more information, please visit: [www.motorolasolutions.com/BWC](http://www.motorolasolutions.com/BWC)



Motorola Solutions Ltd. Nova South, 160 Victoria Street, London, SW1E 5LB, United Kingdom

Availability is subject to individual country law and regulations. All specifications shown are typical unless otherwise stated and are subject to change without notice. MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.  
 © 2023 Motorola Solutions, Inc. All rights reserved. 02-2023 [JP13]